


Floor slats



Laboratory: comfort and anti-slip protection, flexible floor slats roll up for easy cleaning (ref. 61400).





Workshop: floor slats provide comfortable and insulated surface (ref. 61900).

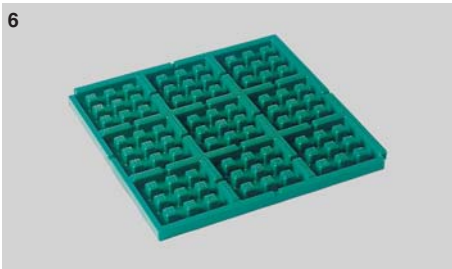

RETENKIT SPILL FLOORING

6 Ref. 619S0
Polypropylene
2.5 litres retention volume per slat
No tools required for assembly, slats simply interlock together to protect employees and flooring from harmful leaks and spills.
Dim.: L 508 X w 508 X h 30 mm
Dim.: L 20.0 X w 20.0 X h 1.2"
Wt: 1.4 kg/3.1 lbs.,
Colour: green.

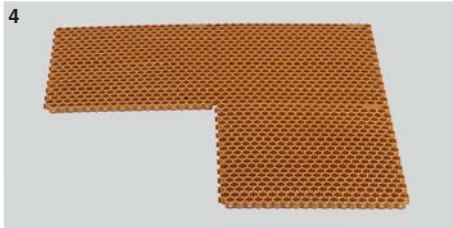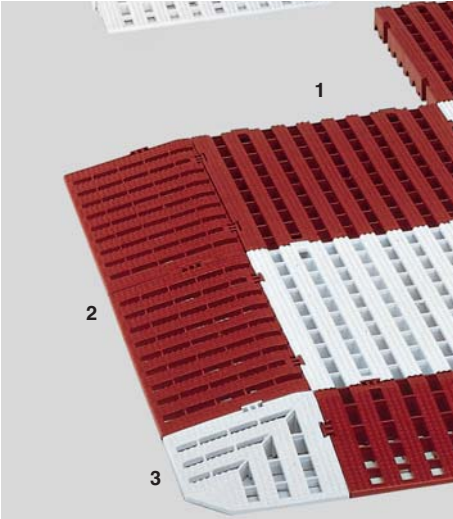

4 Ref. 61800
honeycomb floor slat
Dim.: L 503 X w 486 X h 20 mm
Dim.: L 19.8 X w 19.2 X h 0.8"
Wt: 0.75 kg/1.6 lbs., Colour: caramel.
Designed to satisfy the needs of Health and Safety Regulations; it is hygienic, durable and considerably reduces noise levels.
SKU quantity: 20



7 Ref. 61300
raised flooring
Dim.: L 1,000 X w 1,000 X h 40 mm
Dim.: L 39.4 X w 39.4 X h 1.6"
Wt: 6.30 kg/square metre - with 200 mm feet
Wt: 6.80 kg/square metre - with 300 mm feet
Colour: brown-red.
Load (fitted with 13 feet): 150 kg/m²
Easy and quick to install or dismantle, feet simply twist-lock into the base of each panel, no tools required. Can be cut to size.

Ref. 00103
feet for raised flooring ref. 61300
height: 200 mm/7.9", Wt: 0.10 kg/0.2 lbs.
13 per panel.


Ref. 00104
feet for raised flooring ref. 61300
height: 300 mm/11.8", Wt: 0.14 kg/0.3 lbs.
13 per panel.

RIGID FLOOR SLATS


1 Ref. 61900
industrial floor slat
Dim.: L 500 X w 500 X h 50 mm
Dim.: L 19.7 X w 19.7 X h 2.0"
Wt: 1.95 kg/4.3 lbs., Colour: brown, white.
Interlock to provide a safe, stable surface and resistant to virtually all forms of chemical corrosion. Ramp sections provide easy access for all handling equipment.
SKU quantity: 10

2 Ref. 61901
ramp for ref. 61900
Dim.: L 500 X w 250 mm
Dim.: L 19.7 X w 9.9"
Wt: 0.85 kg/1.9 lbs., Colour: brown, white.
SKU quantity: 6

3 Ref. 61902
corner ramp for ref. 61900
Dim.: L 250 X w 250 mm
Dim.: L 9.9 X w 9.9"
Wt: 0.39 kg/0.9 lbs., Colour: brown, white.
SKU quantity: 32

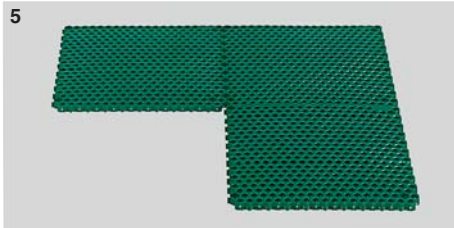

5 Ref. 61805
pedestrian floor slat
Dim.: L 503 X w 486 X h 20 mm
Dim.: L 19.8 X w 19.2 X h 0.8"
Wt: 0.93 kg/2.1 lbs., Colour: green.
The ideal surface for outdoor walkways, around swimming pools, showers, etc.
SKU quantity: 20

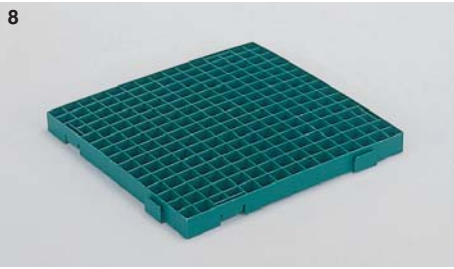




8 Ref. 61190
minimum order item
polypropylene floor grille
Dim.: L 500 X w 500 X h 40 mm
Dim.: L 19.7 X w 19.7 X h 1.6"
Wt: 2.0 kg/4.4 lbs., Colour: dark green
max load: 125 kg/276 lbs., per panel
Designed for poultry rearing and pigeon lofts, this floor grille is hygienic and easy to clean.
The all-plastic construction and minimal surface area reduce risk of infection
Quick and easy to install - can be cut to size

Allimat

Safety and fatigue relief matting

- Safety: ribbing in each direction provides extra grip, both to the floor and to the people or traffic using the matting. Allimat readily conforms to floor contours.
- Fatigue relief: The ideal flooring for workstations, Allimat fights against operator fatigue when standing for long periods and insulates from cold.
- Noise reduction: noise levels are reduced dramatically on hard floors such as concrete, steel and tiles.
- Reversible: for double working life. An optional edging strip is available, Allimat is supplied in 5 m (16.4 ft) and 10 m (32.8 ft) rolls of 0.6, 0.9, 1.2 or 1.5 m (2.0, 3.0, 4.0 or 5.0 ft.) widths.

Alligridd

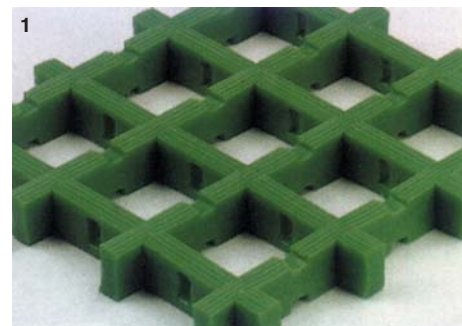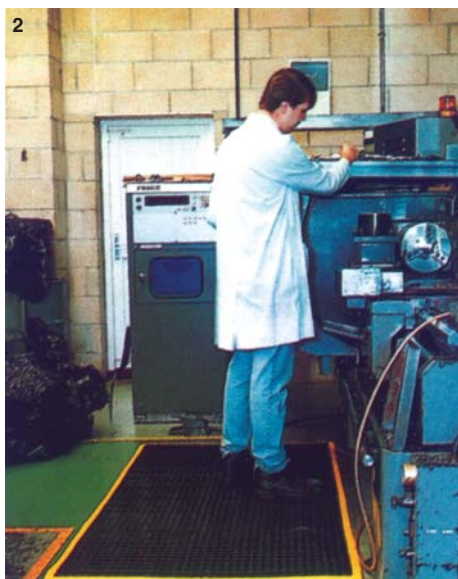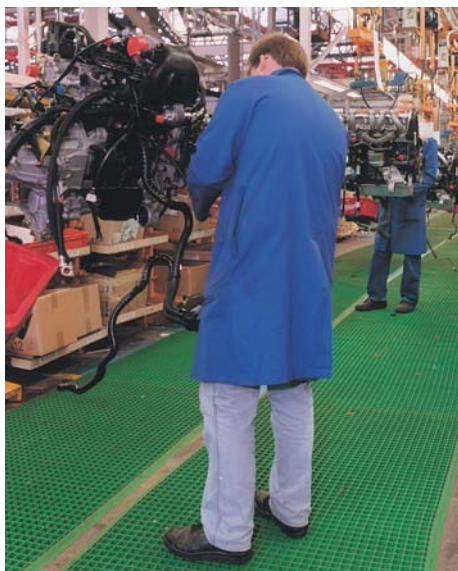

1 Ref. 61200 Allimat

Mesh size: 22 X 22 mm/0.9 X 0.9"
Wt: 4.85 kg/m² (1.1 lbs./ft²)
Colour: black, blue, green, red and other colours available on application.

Ref. 61201 Allimat

Mesh size: 30 X 30 mm/1.2 X 1.2"
Wt: 4.3 kg/m² (0.9 lbs./ft²)
Colour: black, blue, green, red and other colours available on application.

Ref. 61206 Allimat

Mesh size: 30 X 10 mm/1.2 X 0.4"
Wt: 5.5 kg/m² (1.2 lbs./ft²)
Colour: black, blue, green, red and other colours available on application.

Ref. 61250 Hygimat

Hygienic matting for the food industry, resistant to fats and oils
Mesh size: 22 X 22 mm/0.9 X 0.9"
Wt: 4.85 kg/m² (1.1 lbs./ft²)
Colour: cream, terracotta.

2 Entrance/Workstation mats

Allimat ref. 61200 cut to size with perimeter edging strip.
sizes:
Ref.: 61511: 1,200 X 600 mm/48 X 24"
Ref.: 61513: 1,500 X 1,000 mm/60 X 39"
Ref.: 61515: 1,800 X 1,200 mm/72 X 48"
Colours: black, blue, brown, green, grey, red and yellow.
Workstation mats in black with high visibility yellow safety edging.



Alligridd: corrosion resistant flooring.

Alligridd	Ref.	Mesh (mm)	Thickness (mm)	Panel sizes (mm)	Weight (Kg/m ²)
Foot traffic series	6G90	85 x 18	25	1,000 x 2,000	13.5 Kg
	6GE0	30 x 30	25	1,000 x 2,000	13.5 Kg
Light/Heavy traffic series	6G30	19 x 19	30	1,000 x 2,000	16.0 Kg
	6730	19 x 19	30	1,000 x 3,000	16.0 Kg
	6G80	30 x 30	30	1,000 x 2,000	15.5 Kg
	6780	30 x 30	30	1,000 x 3,000	15.5 Kg
Heavy traffic series	6G70	30 x 30	38	1,000 x 2,000	19.0 Kg
	6G40	19 x 19	40	1,000 x 2,000	21.5 Kg
Very Heavy traffic series	69I0	40 x 15	55	1,500 x 3,000	28.9 Kg

Manufactured in GRP (glass reinforced polyester), Alligridd walkway and stair-tread grating is strong, safe, and exceptionally corrosion resistant.
Other dimensions available on demand.